

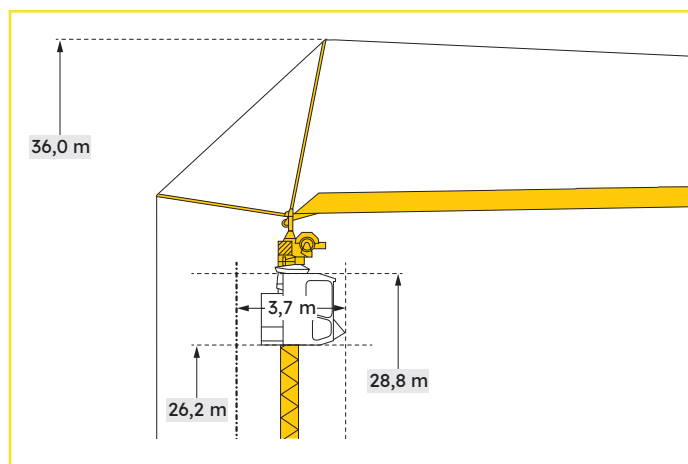


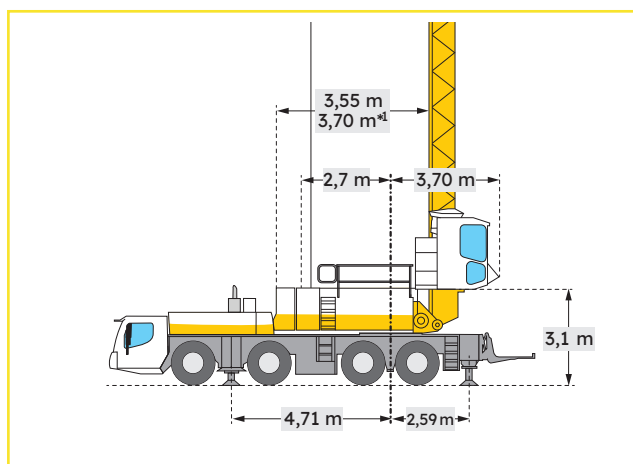

LIEBHERR

MK 88

45
Mètres

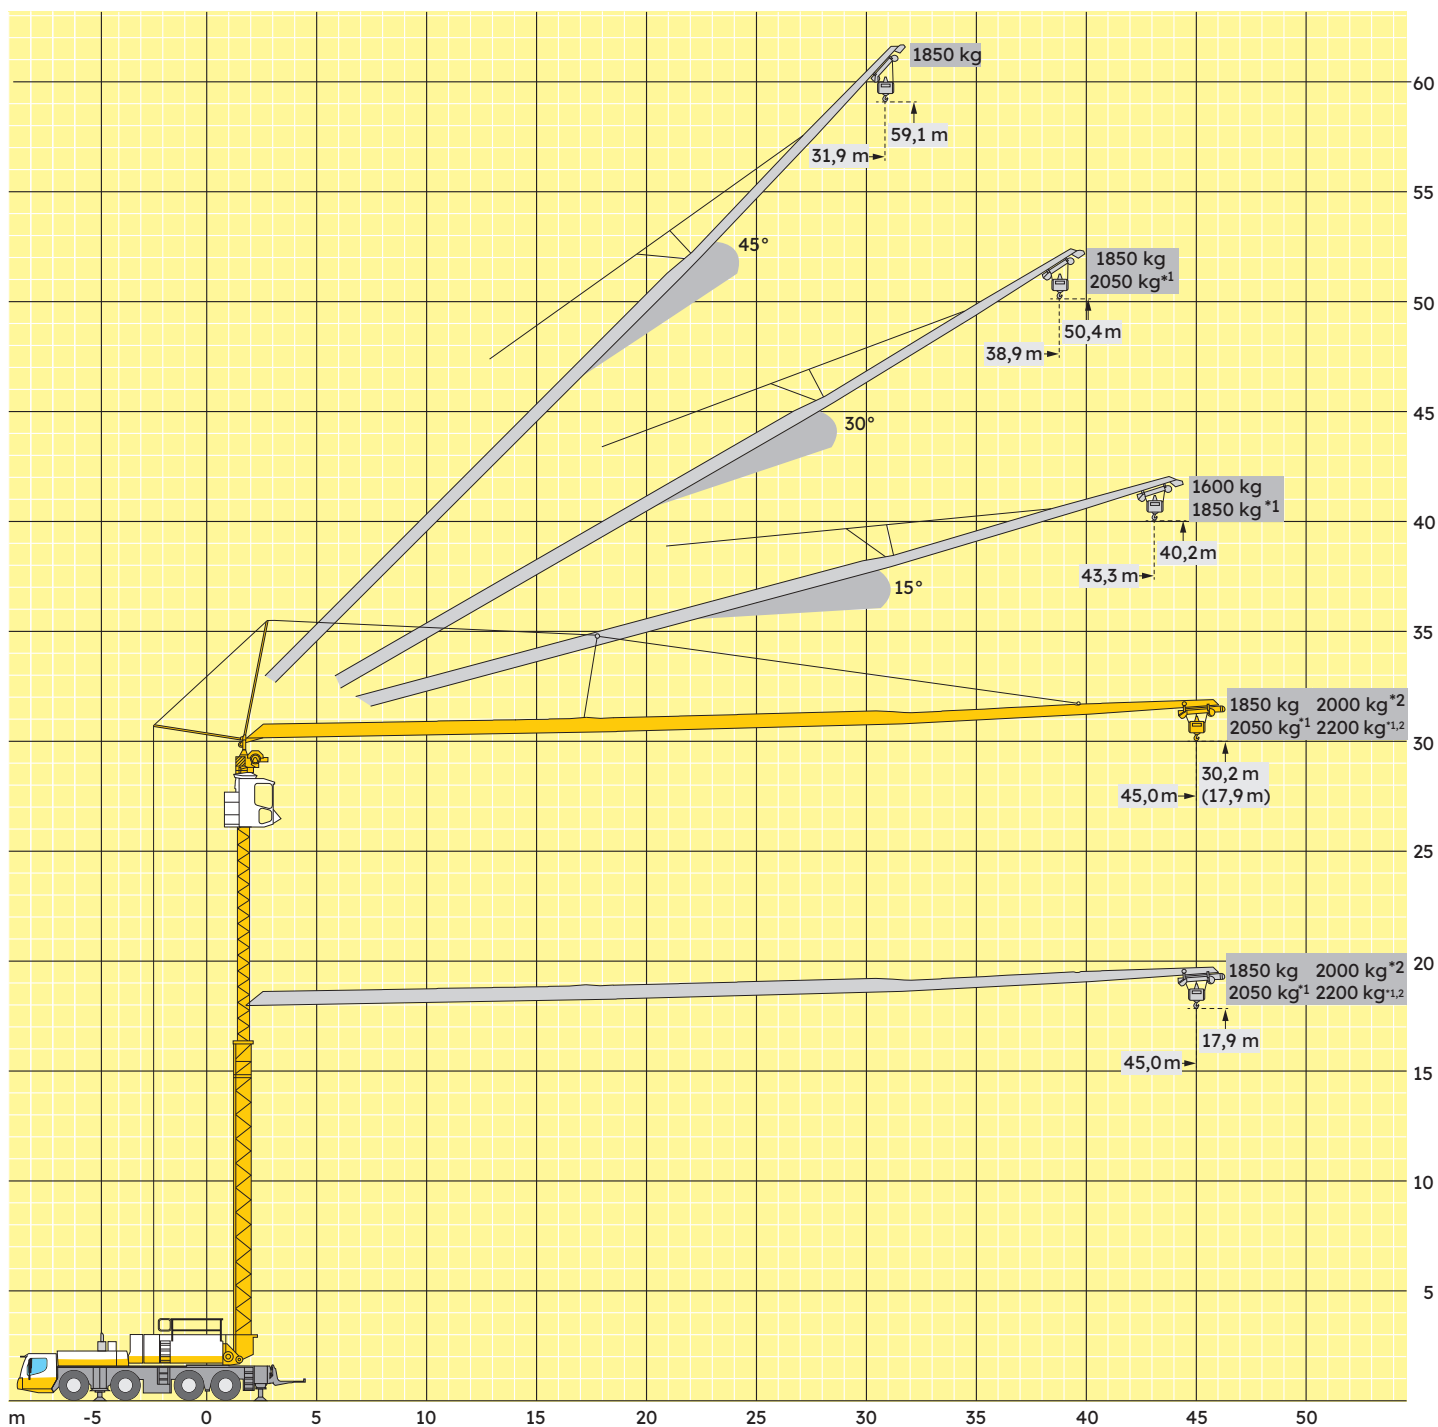



LIEBHERR

MK 88

45
Mètres

Télécharger
la fiche du constructeur



= max. 20,0 m/sec = max. 14,0 m/sec

	m																						
α°		m	kg	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	45	
0°	45,0		3,3 - 12,0	8000	8000	8000	6900	6070	5410	4870	4420	4 050	3730	3450	3210	2990	2800	2630	2480	2340	2220	2100	2050
			3,3 - 11,0	8000	8000	7370	6360	5580	4960	4460	4050	3700	3400	3140	2920	2720	2540	2390	2250	2120	2000	1900	1850
	Plus*2		3,3 - 13,0	8000	8000	8000	7490	6600	5900	5320	4840	4440	4090	3790	3530	3300	3090	2920	2760	2600	2440	2280	2200
15°	43,3		3,2 - 40,0	1850															1700* ³				
			3,2 - 35,0	1850															1400* ³				
30°	38,9		3,0 - 11,0	6000	5650	5050	4560	4150	3810	3510	3250	3030	2830	2650	2490	2350	2220	2050					
			3,0 - 9,0	5620	4970	4450	4020	3660	3360	3100	2870	2670	2490	2340	2200	2070	1950	1800					
45°	31,9		2,7 - 31,9	1850																			
			2,7 - 31,9	1850																			

*² Courbes de charges Plus avec des limitations de commande par rapport à la courbe de charge standard.

*³ Indications de charges pour hauteur maximum; des charges supérieures sont possibles pour des hauteurs réduites.

